

Realtime T502F Plus

FACE RECOGNITION IN AADHAAR ENABLE

**SUPPORT ALL
READERS**



MANTRA



IRI TECH



FM 220U



MANTRA





MORPHO



PRECISION



GeM
Government
e Marketplace

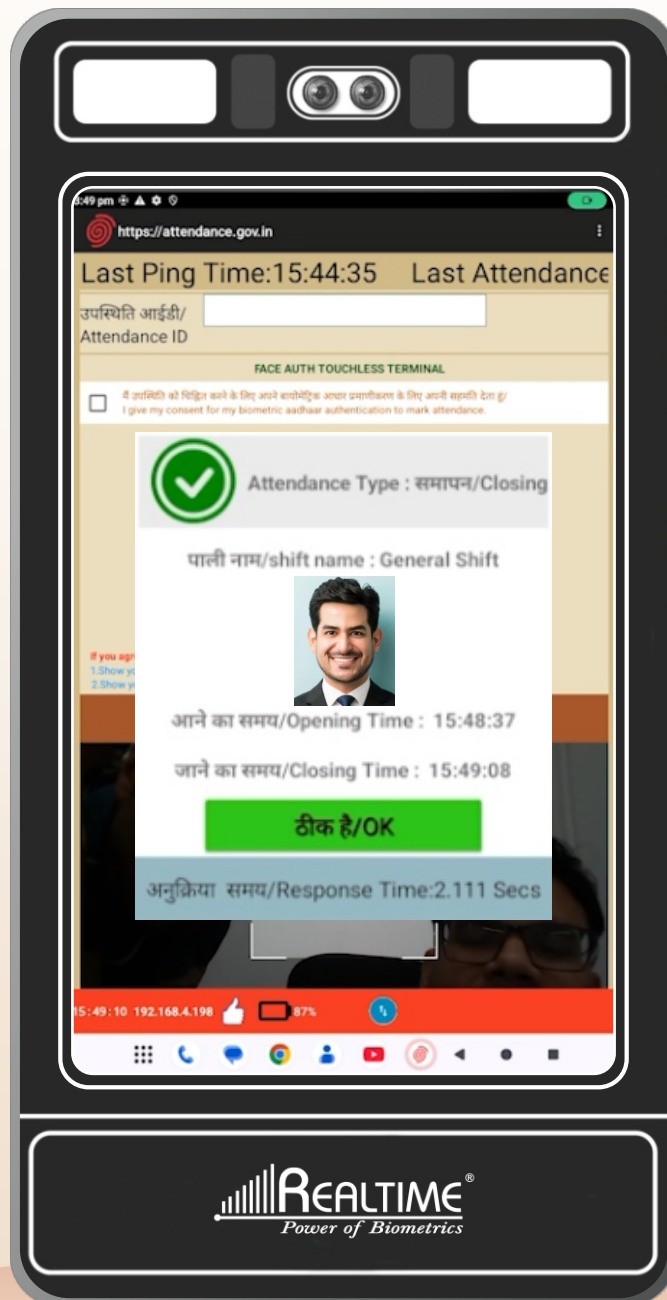

**FACE
RECOGNITION**

**6GB RAM
128GB Storage**

**8.5 Inch
SCREEN SIZE**

**4 Hours
Battery Backup**

**Available
on GEM**

C Type | TCP/IP | DC Charging | Wi-Fi | Bluetooth | 4G/5G | USB Link | GPS

CONFIGURATION :

Product Form	Product Form	AADHAAR ENABLE FACE RECOGNITION
	Connectivity	LAN, USB, WI-FI, BT, 2G, 3G, 4G, 5G
	Casing Type	Plastic
LCD	Screen Size	8.5 Inch
	Screen Resolution	800x1280 IPS Touch Screen
TP	Touch Module	5 Points Multi-Touch G+G
Battery	Type	Lithium-ion 14650
	Capacity	3.8V/9000mAh
	Endurance	4 - 5 hours

HARDWARE :

Processor	Type	Octa Core 2.3Ghz
GPU	Type	IMG 8XE 1PPC@570M
RAM	Capacity	6GB
ROM Flash	Capacity	128GB
Storage	Expandable	256GB
Camera	Front	5MP (Face Recognition)
	Back	5MP
Speaker	Built In	Built-in 8Ω/0.8W speaker * 1
G_Sensor	Built In	3 axis accelerometer

NETWORK :

WIFI	WiFi Module	WIFI 802.11 ac/b/g/n 2.4G+5G
Bluetooth	BT Module	BT 5.0
2G GSM	Built In	850 900 1800 1900
3G UMTS	Built In	900 2100
4G LTE /5G	Built In	B1 B3 B5 B7 B8 B28A B28B B38 B39 B40 B41

AADHAAR BASED

FACE RECOGNITION ATTENDANCE SYSTEM

INTERFACE :

Memory Card Socket	External Memory	Upto 256GB
SIM Card Slot	Internet Data	1 SIM Card
USB Interface	USB Interface Type A	Must have 1 port
	USB Interface Type C	Type-C 2.0*1 ((Data+Charging)) Must have 1 port
LAN	Support	RJ 45

Face Recognition	Face Camera	5MP (Face Recognition Dual Camera)
	Scanning	1/15 second
	Image resolution	500 dpi (H),500 dpi(V)
	Image capture format	13.3 x 16.4(mm) (H * V)
	Scanner output image size	264 * 324 pixels(H * V)
	Gray Level	8bits/pixel,max 256 gray scales
	Image ratio of length to width	01:01
	Power supply	12V -3amp
	Minimum hardware	P3 800MHz CPU or up,256MB,USB2.0
	Distortion	<1%
	Temperature (without external enclosure)	0°C~50°C
	Humidity	<90% non condensing
	Scanning light source	infrared red (940nm)
Operating volts	12V, 3amp	

DC Jack	Input Device	Support
---------	---------------------	---------

ACCESSORIES :

Power Adapter	Standard Configuration	DC Jack (12volt 3 amp) Fast Charger
Type-C Patch Cord	Standard Configuration	Yes

SOFTWARE :

Operating System	Operating System Version	Android 15.0
	SafetyNet passed, un-rooted and RD services (UIDAI) tested	
	GMS	Direct Contract between Google and Brand

AADHAAR BASED

FACE RECOGNITION ATTENDANCE SYSTEM

www.realtimebiometrics.com